# **SPECIFICATION FOR APPROVAL**

承认书

USTOMER NUMBER	
客户名称:	编 号:
DESCRIPTION	QUANTITY
品 名: 贴片共模滤波器	数 量:
PART NO.	DATE
型 号: BCCM7660-2-301T01	日期:
CUSTOMER PART NO.	NOTE
客户料号:	注解:

APPROVAL SIGNATURE 客户承认签章

APPROVED BY	Q. C. DEPT.	CHECKED BY	DRAWN BY
核 准	品 管	核 査	制作

### DC COMMON MODE FILTER

#### **FEATURES**

- A chip-type common mode filter for large current applications. Common mode impedance surpasses  $300\,\Omega$  at 100MHz. Noise is greatly suppressed.
- Capable of handling the highest current (up to 3.4A) of any chiptype common mode filter.
- Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.
- The products contain no lead and also support lead-free soldering.
- The product does not contain regulatde substances that are slated to be included in ROHS.



#### **APPLICATIONS**

Used for power line noise suppression for any electonic-devices
Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors, etc

#### TEMPERATURE RANGES

Operating	<b>-</b> 40to+125℃
Storage(After mount)	<b>-</b> 40to+125℃

#### Part Number System

<b>BCCM</b>	<u>7660</u>	<u>-2</u>	<u>-301</u>	<u>T</u>	01
(1)	(2)	(3)	<b>(</b> 4 <b>)</b>	(5)	<b>(6)</b>

- ① Type:BCCM
- (2) External Dimensions (L×W) (mm): 7.6\*6.0
- 3 Number of Lines: 24 Impedance: 301=300 Ω
- ⑤ Packing:Tape & Reel
- ⑥ Management Symbol:01


#### ELECTRICAL CHARACTERISTICS

Part No.	lmpedance (Ω)min[at 100MHz]			Insulation resistance $(M\Omega)$ min
BCCM7660-2-301T01	300	30	3. 4	10

## DC COMMON MODE FILTER

# TYPICAL ELECTRICAL CHARACTERISTICS IMPEDANCE vs. FREQUENCY CHARACTERISTICS


BCCM7660-2-301T01

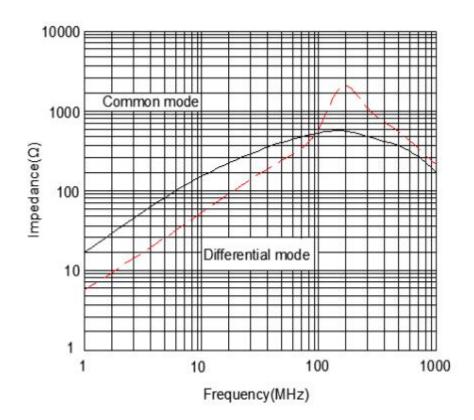


## DC COMMON MODE FILTER

# SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM/RECOMMENDED PC BOARD PATTERN (REFLOW SOLDERING)

◆ Dimensions (mm)

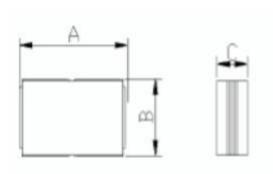



UNIT: mm

 $A:7.6 \pm 0.5$ 


 $B:6.0\pm 0.5$ 

C:4.3 (MAX)


D:2.60 E:2.50

F:2.10 G:1.80

◆ Land Pattern (mm)




◆Schematics(Bottom)



No polarity


# DC COMMON MODE FILTER

### **Recommended Reflow Temperature Curve**

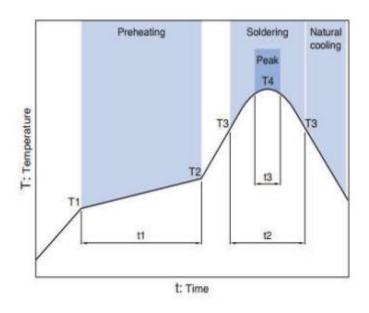

Preheating		Solderin	Soldering		Peak		
Temp.		Time	Temp.	Time	Temp.	Time	
Γ1	T2	t1	T3	12	T4	13	
150°C	180°C	60 to 120s	230°C	10 to 30s	245°C	5s	

# Package size (mm)

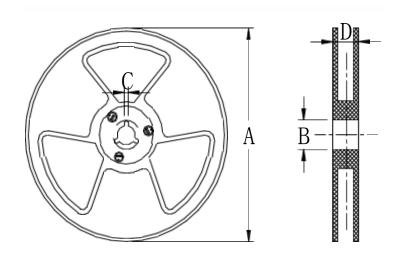

Specs size	13"	7"
A	Ф330±2.0	Ф178±2.0
В	$\Phi 90 \pm 2.0$	
С	2.3	
D	21.5	